

Due to continuous vehicle model improvements, the data and specifications provided in this manual may have been updated; no further notice will be given.

Xuzhou Hanpeng Locomotive Co., Ltd.

Phone: 400-666-9076

Site Address: Fengxian Electric Vehicle Industrial Park, Xuzhou City,
Jiangsu Province

Accessories Industrial Park, No.7005 Changxia
Road

XF22000ZH

operating instruction

OWNER'S MANUAL

Jiangsu Hanpeng Locomotive Co., Ltd.

Jiangsu Hanpeng Locomotive Co., Ltd.

Friendly Reminder

I. Please observe traffic rules strictly.

II. To ensure personal safety, the following individuals are prohibited from operating vehicles: 1. Those who do not possess a valid driver's license are prohibited from riding; 2. Minors and persons under the influence of alcohol; 3. Persons with mental illness or a history of mental illness; 4. Persons with heart disease; 5. Color-blind individuals or individuals with poor vision for red, yellow, or green colors; 6. Deaf-mute individuals and other persons deemed unsuitable to drive; 7. Vehicles should undergo regular maintenance within 3 months.

preface forward

Dear User:

Hello! Thank you for purchasing and using our "Xianfeng Shiji Xing Brand" electric tricycle series products!

Our products feature advanced design, superior craftsmanship, reliable quality, comfortable riding experience, and easy maintenance; they are well-suited for various applications such as personal commuting, transportation, shopping, and leisure activities.

Over the years, the hundreds of thousands of electric tricycles our company has introduced to the market have not only won widespread popularity among users but have also become the preferred choice for people seeking lightweight transportation or personal mobility solutions.

I believe that by choosing the "Pioneer Century Star" electric tricycle, you are guaranteed both superior quality and enhanced safety!

Note: 1. To facilitate your purchase, maintenance, and normal use, please read this manual carefully;

2. Please only operate the vehicle after you have a thorough understanding of its basic performance characteristics and key precautions, to avoid damaging vehicle components or compromising personal or property safety;

3. The product drawings contained in this manual are for illustrative purposes only; the specific vehicle model and configuration shall be subject to the actual vehicle;

4. Our company reserves the final right of interpretation for this manual.

Precautions ▼

1. Drivers must receive professional training before operating this vehicle; otherwise, they shall be solely responsible for any consequences arising therefrom.
2. The driver must hold a Class D driver's license to operate this vehicle; otherwise, the driver shall bear all consequences.
3. The driver shall not operate this vehicle in violation of traffic regulations; otherwise, the driver shall bear full responsibility for any resulting consequences.
4. The driver shall strictly comply with the precautions outlined in this vehicle operating manual; otherwise, the driver shall bear full responsibility for any resulting consequences.
5. This electric tricycle is classified as a motor vehicle; the driver must strictly comply with all motor vehicle driving regulations and applicable laws when operating this vehicle; otherwise, the driver shall bear full responsibility for any resulting consequences.
6. The doors of the electric tricycle purchased by the consumer shall be compliant with the vehicle standards; the consumer shall only make payment after verifying that the vehicle meets the required standards.

7. Please schedule a vehicle inspection and maintenance at your local authorized dealer within the first month after purchasing the vehicle; thereafter, visit your local dealer every two months for a vehicle check-up; brake pads should be replaced every 8-12 months.

8. It is prohibited to turn on the ignition switch while not in the driver's seat.

9. The driver's seat is intended for only one person; it is strictly prohibited for minors or individuals without driving competence to play, ride, or drive in the driver's seat.

10. When starting the vehicle, rotate the main throttle lever more slowly; do not rotate it all the way to the bottom at once. When exiting the vehicle, turn off the power promptly, set the switch to neutral, engage the handbrake, and avoid parking the vehicle on a half-slope or halfway up a mountain, or in any other hazardous location.

11. The charging voltage for the vehicle is 220V, with a recommended charging duration of 8-12 hours; the power cable used for charging must have a cross-sectional area of at least 2.5 mm² of copper wire; it is strictly prohibited to charge multiple vehicles on the same power supply to avoid power overloading and potential fire hazards; during charging, maintenance work on the vehicle is prohibited to prevent battery explosions; while charging, it is strictly forbidden to load cargo or passengers onto the vehicle, and the vehicle must be kept away from warehouses and areas containing flammable or explosive materials; if the vehicle is not in use for an extended period, it should be charged every 10 days to protect the battery.

12. When driving at night, you should turn on your headlights and drive slowly, while paying close attention to road conditions; when driving in rainy weather, the depth of accumulated water shall not exceed the centerline of the motor.

13. When turning, the speed must not exceed 10 km/h to avoid a rollover.

14. When driving on steep slopes, pay close attention to safety; when descending a steep slope, you must reduce your vehicle speed in advance to prevent the vehicle from sliding down after braking.

15. The consumer shall bear sole responsibility for any resulting consequences arising from unauthorized modifications to the engine or range extender, or from the installation of additional components such as a vehicle frame, canopy, or batteries that are not specified by the manufacturer; the manufacturer shall not be held liable for such actions.

16. When riding a bicycle, please hold both hands firmly on the handlebars; do not drive with one hand; strictly comply with traffic regulations; driving under the influence of alcohol is strictly prohibited; making phone calls while riding is strictly prohibited; overloading is strictly prohibited; and passengers are not permitted in the rear cargo compartment. Do not entrust driving to minors; reduce speed in advance when cornering or descending a slope.

17. Perform regular maintenance; schedule inspections and servicing at the dealer at least every two months; periodically check the motor gearbox oil level to ensure there are no oil leaks or insufficient oil levels; promptly repair any detected faults; it is prohibited to operate a vehicle with any malfunctioning components.




18. All terms and conditions set forth herein require the Purchaser to strictly comply with them and to use the vehicle in a safe and civilized manner; otherwise, the Purchaser shall bear all corresponding liabilities and consequences.

I. Technical Specifications of Three-Wheel Electric Motorcycles	01
II. Vehicle Model Image Dimensions and Speed-Mileage Data	02
III. Description of Major Electrical Systems	09
IV. Vehicle Safety Operation and Precautions	11
V. Lubrication	12
VI. Electrical wiring schematic diagram for electric tricycles (Examples provided for illustrative reference only regarding circuit principles)	13
VII. Common Faults and Troubleshooting	14
VIII. Quality and Service Commitment	15
IX. After-sales Service	17
X. Comparison Table: Analysis of Product Quality between Established Brands and Counterfeit/Impure Brands	18
11. Warning to users...	19

Electric tricycle technical specifications ▼

I. Specifications (Partial List)

1. External dimensions: (mm)	Length: 2960; Width: 1080; Height: 1660		
2. Fuel type:	Pure electric	3. Emission Basis Standard:	
4. Wheelbase (mm):	1980	5. Wheelbase (Front/Back) (mm)	Front/Back 895
6. Rated maximum load capacity (kg): 220		7. Empty weight (kg):	193
8. Maximum speed (km/h): 51		9. Rated Voltage	Voltage: 60 V
10. Braking system (front wheels): Disc brake		11. Braking method (rear wheels):	drum-type
12. Braking Operation Method (Front Wheels): Footbrake		13. Braking operation method (rear wheels):	Brake pedal
14. Total weight: 478		15. Number of shafts:	2
16. Number of tires: 3		17. Tire specifications:	Front: 3.5-12; Rear: 3.75-12
18. Steering configuration: Directional steering		19. Maximum number of passengers permitted in the cab:	
20. Rated passenger capacity: 1		21. Emission levels:	
22. Vehicle Identification Number (VIN): HN2ZYGxxxxxx		23. Energy consumption rate of electric motorcycles (Operating condition method / Constant speed method) (Wh/km):	
Product Inspection Instructions			

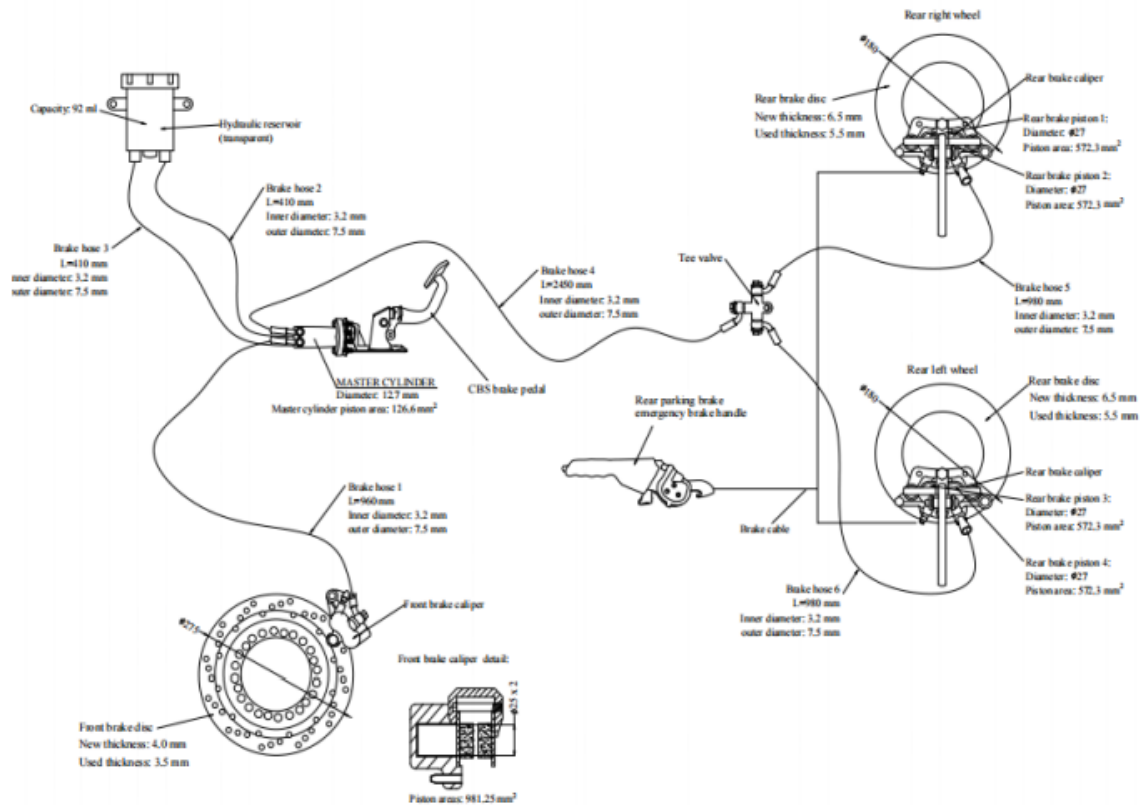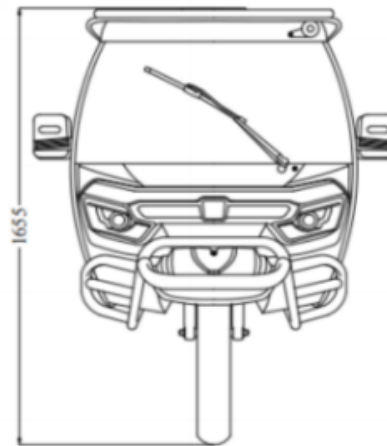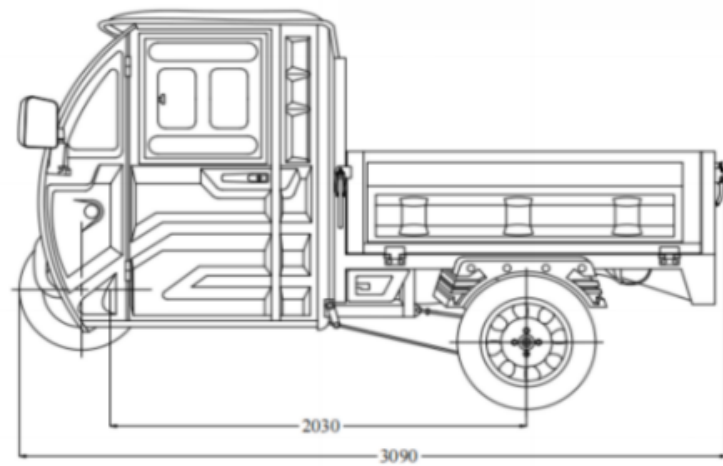

II. Basic Features (The Following List Includes the Basic Functions Common to All Models; It Is Not Exhaustive):

- 1、 This device utilizes a Hall-effect speed control handlebar; during riding, you only need to turn on the power supply and gently rotate the speed control handlebar to achieve seamless stepless speed adjustment, while also featuring functions such as battery level display, brake power-off protection, overcurrent protection, and undervoltage protection.
- 2、 These vehicles utilize maintenance-free high-performance lead-acid batteries and employ differential motors across multiple models, offering advantages such as high efficiency, low noise levels, zero emissions, maintenance-free operation, and an extended service life.
- 3、 Both left and right brake levers feature a brake power-off function; when braking, the power supply is automatically 切断, thereby ensuring reliable braking and riding safety.
- 4、 When horn signaling is required, press the horn switch on the handlebar; when driving at night, turn on the headlights switch.
- 5、 The device features a low-voltage warning and protection function: when the voltage falls below the specified threshold, the protective device will automatically cut off power to safeguard the battery; after recharging, normal operation is restored for use.
- 6、 The device features overcurrent protection; when driving on terrain with excessive slopes, traveling against the wind, or carrying an overloaded load, the current will increase. When the current exceeds the specified threshold, the protective device will automatically cut off power, thereby protecting the motor and the controller. In the event of such a power-off situation, first turn off the power supply (key)(OFF), then rotate it to (ON), and the system will be restored to operation.

Main Electrical System Description: Electrical/Systems; EM

I. Battery

- 1、 The battery is a critical component for maintaining the vehicle's optimal performance; please use it correctly and store it properly. Please develop the good habit of charging the battery promptly to maintain and extend its service life.
- 2、 Almost all battery performance metrics are affected by ambient temperature: when the ambient temperature is high, the battery's discharge performance (vehicle operating capability) is optimal; however, when the ambient temperature falls below 0 °C, the battery's discharge performance (vehicle operating capability) may decrease by more than one-third. Therefore, in winter or in cold regions, a reduction in the driving range after charging is considered normal. Once the ambient temperature rises above 20 °C, the battery's normal functionality will naturally be restored.
- 3、 All batteries (even when not in use) will naturally discharge; if the battery is stored while its charge level is low (undercharged), it may affect the battery's lifespan; if the battery is not used for an extended period, please ensure that it is fully charged before storage, and perform a full charge every 20–30 days.

II. Charging Methods and Precautions

- 1、 Battery charging should be performed using the dedicated charger provided with this vehicle; please do not use any other charging equipment to avoid damaging the battery.
- 2、 First, connect the output plug of the charger to the battery charging port, then connect the input plug of the charger to a 220V AC power supply. At this point, if the power indicator light and the charging indicator light (red) on the charger illuminate, it indicates that the power supply has been connected and charging has begun.
- 3、 Under normal conditions (when the battery is under-voltage), the single charging cycle typically takes approximately 4–8 hours; when the charging indicator light changes from red to green, it indicates that the battery's charge level is generally sufficient. However, if time permits, it is recommended to perform an additional "float charge" for 1–2 hours to ensure the battery gains more charge; nonetheless, the duration of a single charging cycle should preferably not exceed 12 hours.

Do not exceed this duration; otherwise, it may cause battery overheating damage or other adverse events.

4、 If the red light remains on after 10 hours of charging with the charger, you should immediately take the device to a dealer for repair or replacement.

III. Motor

- 1、 During the startup process, the motor may produce some noise, which is considered normal.
- 2、 The differential motor may feel somewhat heavy when reversing; this is a normal phenomenon.
- 3、 When driving on flooded roads during rainy weather, you should drive slowly; the depth of water on the road surface must not exceed the height of the motor's mounting plate for normal operation; otherwise, the motor may be exposed to water, potentially causing damage to the motor or electrical components.

IV. Electrical System

- 1、 The electrical system consists of a controller, instruments, a speed control lever, and a brake lever; it features stepless speed regulation, brake power-off protection, under-voltage protection, and overload protection functions.
- 2、 The controller has a relatively high operating current and generates a certain amount of heat; therefore, it must not be covered, and prolonged operation under heavy loads at high speeds or during hill-climbing conditions should be avoided.
- 3、 When using the speed control handle, rotate gently and release slowly; do not apply forceful rotation.
- 4、 When using the brakes, avoid frequent or sudden braking, and ensure that the throttle lever is relaxed.
- 5、 When parking the vehicle, it should be placed in a cool, dry location, avoiding direct sunlight or exposure to rain.

Sa e Use an Precautions Atenjtions.v

- 1、 Before riding your bike, please read this "*Customer User Manual*" carefully and thoroughly inspect all vehicle components to ensure your safety on the road. If you identify any issues, please contact your dealer promptly.
- 2、 The upright surface of this product is resistant to rain and snow; however, some exposed circuits may experience minor malfunctions due to rainwater exposure, but these issues will not affect normal use once the area has dried. Nevertheless, this product must not be submerged in water; if water levels reach the rear wheel motor hub, battery, or other electrical components, it may cause short circuits in the internal wiring of the entire vehicle and damage the electrical systems—please take this warning seriously.
- 3、 The battery used in this vehicle is a safety battery; however, neither of the two terminals on the BoxRi can be touched simultaneously with your hands, nor can they come into contact with any metal (including between the two polarity pins of the three plug pins at the internal and external charging ports). Failure to observe these precautions may result in a significant short-circuit current, potentially causing an accident. Please pay close attention to these instructions.
- 4、 Do not attempt to disassemble or remove components yourself; if replacement is required, please purchase standard parts from your local dealer or a designated repair station.
- 5、 When riding in rainy or snowy weather when roads are slippery, reduce your speed; if you need to brake, do so in advance.
- 6、 It is strictly prohibited to open or modify our company's products without authorization. The Company shall not be liable for any losses arising from such actions; furthermore, this may result in your loss of warranty coverage or cause the vehicle to experience malfunctions. In such cases, you should contact your local dealer or designated service center.
- 7、 Any consequences resulting from non-compliance with standard operating procedures shall not be attributable to our company.

7、 Do not remove the speed limit device yourself; doing so may lead to speeding and pose a risk of personal injury or property damage!!!

[Note: Any accident arising from this shall be borne solely by the responsible party.]

8、 If you experience loss of speed control while cycling, please immediately turn off the power and apply the brakes; then, take the vehicle to a dealer or designated repair station as soon as possible for repairs.

9、 After using a newly purchased vehicle for some time, please inspect all fastening bolts and nuts; if any are found to be loose, please tighten them again! During future riding, you should perform regular inspections and follow the maintenance instructions provided in the manual!



Lubrication Lubritat°C v

1、 Apply lubricant (SH/TO386 Ball Bearing Lubricant) to the front axle bearing housing, front fork assembly, and middle axle bearing ball at least once per year; for the rear axle, add lubricant once every 1,000 kilometers; if necessary, a maintenance technician should disassemble the component for inspection and lubrication.


2、 For wheel hub bearings and steering column bearings, add L-AN 46 GB 443 lubricant once per month; for chains and brake pipes, add L-AN 46 GB 443 lubricant once every six months.



Electrical wiring schematic diagram for an electric tricycle (for illustrative purposes only); Schematic

Diagram.

Electrical wiring schematic diagram for electric tricycle

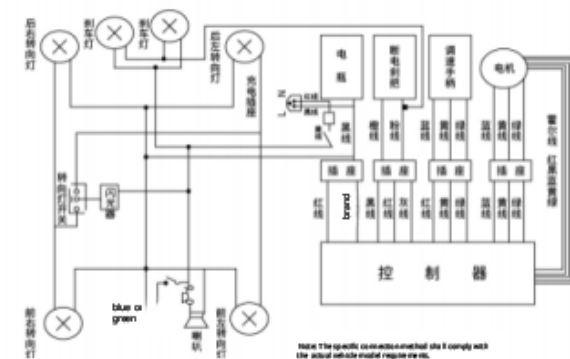

Back-mounted three-wire harness

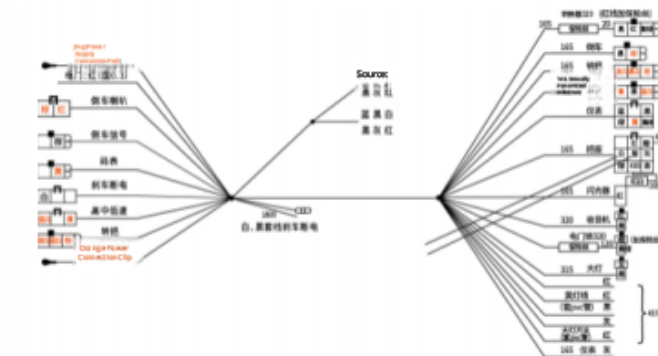




Table of Contents Number	Fault Phenomenon	Failure Cause	Exclusion Method
1	The speed control lever is malfunctioning or the maximum operating speed is too low.	(1) Battery voltage is too low; (2) The wire connected to the speed control handle is loose; (3) The speed control lever's spring is jammed or has failed.	(1) (1) Fully charge the battery; (2) Re-solder; (3) Clean or replace the speed control lever.
2	After connecting the power supply, the electric motor does not operate.	(1) (1) Battery voltage is too low; (2) The wire connected to the speed control handle is loose. (3) The motor hub wiring connector is loose or damaged.	(1) (1) Fully charge the battery; (2) Re-solder; (3) Seek repair services from a professional technician or an authorized service center.
3	Insufficient range after a single charge	(1) (1) Insufficient tire pressure; (2) Insufficient charging or charger malfunction; (3) Battery aging or damage. (1) The charger socket is loose or the plug is not securely connected to the socket;	(1) (1) Ensure sufficient battery pressure; (2) Check if the battery is fully charged or if the charger plug has poor contact; (3) Replace the battery.
4	Charger does not charge	(2) The battery compartment or charger fuse has blown; (3) The battery pack wiring is disconnected.	(1) Secure the socket and connectors; (2) Replace the fuse (Charger: 2A; Battery fuse: 20A); (3) Weld the connecting wires.
5	Cycling is physically demanding and slow.	(1) Check whether the brakes are locked; (2) Check whether the tire pressure is adequate; (3) Low battery voltage; (4) Oil leakage at the front or rear wheel axle bearings, or overly tight axle bearings resulting in restricted rotation.	(1) Adjust the brakes; (2) Ensure proper tire inflation; (3) Fully charge; (4) Clean and apply lubricant.
6	Your presence accompanies your ride!	(1) Loose screws or nuts in various locations; (2) Front and rear wheels rubbing against the fork or frame; (3) Rearrangement of sprocket or chain grinding cover; (4) Wear or fracture of the roller components at the front and rear axle sections.	(1) Tighten loose screws and nuts; (2) Adjust the front and rear wheels; (3) Adjust the wheel covers; (4) Replace the ball bearings.
7	Other faults	When you encounter a fault that cannot be resolved independently based on the above guidance or a fault for which you cannot determine the cause	If you encounter any of the above situations, please contact your dealer or a designated service center for repair.



I. "Three Guarantees" (Repair Guarantee, Replacement Guarantee, Return Guarantee) Commitment:

When purchasing a vehicle, you should undergo an on-site inspection and proper calibration; you have the right to request the salesperson to provide correct operating instructions and maintenance procedures; and you may request the salesperson to provide you with the warranty card, along with the repair facility's name, address, and contact telephone number.

II. Scope and Duration of the "Three Guarantees":

1、Motor: When the motor experiences failures such as gear fracture, bearing damage, oil leakage, abnormal noise, or functional failure—provided there are no signs of human-induced or external force damage—the product shall be eligible for the "12-month replacement + 15-month warranty" as stipulated; however, if testing confirms that the motor's functions are normal, or if the failure is due to human-induced damage such as physical deformation, damage, or broken wiring harnesses, the warranty shall not apply.

2、Rear axle: When quality issues such as weld separation or fracture, half-shaft fracture, aluminum sheath cracking, gear fracture or failure, brake caliper cracking, rear axle noise, or oil leakage occur – provided there are no signs of human-induced damage – a "12-month replacement warranty" applies; however, if the product has been subjected to external impact causing deformation or abnormal damage, the warranty does not apply; brake shoe blocks are considered wear parts and are not covered under this warranty.

3、Controller: If performance failure or functional malfunction occurs, rendering the device unable to function normally, but with no signs of disassembly or human-induced damage (e.g., broken wires), a "12-month warranty replacement" shall be provided in accordance with the regulations; if testing confirms that the functionality is normal, the warranty shall not apply.

4、Front axle shock absorber

(1) Hydraulic fork shock absorber warranty: If the hydraulic shock absorber's aluminum shoe breaks, the handle rod's plating peels off or suffers severe rusting, or if there is oil leakage—provided no human-induced damage has occurred—the product shall be eligible for the "12-month replacement guarantee"; however, if the appearance is intact, no functional failure exists, or if the unit has been deformed or fractured due to external impact or other forms of human-induced damage, the warranty shall not apply.

(2) Double-shoulder front fork suspension: If the double-shoulder suspension mechanism experiences fracture or deformation, weld seam opening, severe surface rusting, or peeling of the coating, the product shall be eligible for the "12-month replacement guarantee" in accordance with the regulations; however, if the appearance is intact without any functional failure, or if the product has been damaged by external impact, deformation, or fracture, the warranty shall not apply.

5、 Instrumentation: If the instrument's electrical functions are impaired, the casing is undamaged, the wiring harness is intact, there are no signs of human-induced damage, and the device cannot be used normally, a "3-month replacement guarantee" shall apply; if testing confirms that the functions are normal, this shall be deemed an error case, and warranty coverage will not be provided.

6、 Spring pot plate: For normal use-related issues such as fracture, deformation, or severe surface rusting — provided there are no signs of deliberate damage — a "3-month replacement guarantee" applies; however, if the pot plate suffers from severe deformation or is damaged due to overload or other similar causes, the warranty does not apply.

7、 Warranty Terms: If quality issues arise within 3 months of normal use, warranty coverage will be provided; however, damage caused by external forces is not covered under this warranty.

8、 Brake lever and switch assembly: Warranty covers damage caused by normal use within 3 months; warranty does not apply to damage resulting from external force.

9、 The company manufactures iron components (including frames, carriages, seats, etc.): if quality issues arise after 12 months of normal use, a warranty will be provided; however, unauthorized modifications will not qualify for warranty coverage, but warranty-replaceable repairs may still be performed at an additional cost.

10、 Speaker and sleeve lock: If any quality issues arise within the first 3 months of normal use, a warranty service will be provided.

11、 Tire: If any quality issues (such as bulging or cracking) occur within 3 months of normal use, a warranty claim is granted.

12、 Worn or damaged wear parts, such as inner tires, brake drums, bearings, flywheel and gear set, bulbs, brake calipers, rearview mirrors, plastic components, brake lines, and brake pads, are not covered by warranty.

13、 Pneumatic support rod: If quality issues arise within the first 3 months of normal use, a warranty will be provided.

14、 Wheelset: Under normal use, the "3-month replacement guarantee" applies; if the wheel hub or wheel rim coating experiences peeling, cracking, or weld seam failure; if quality issues with the front wheel hub result in the speedometer becoming stuck and unable to rotate; or if aluminum wheels crack, or the wheel rim undergoes deformation or wobbling during normal riding without any external impact, such quality defects shall be covered by the warranty.

15、 The warranty periods for passenger vehicle models and vehicles used for passenger transport purposes are both reduced by half. (Therefore, neither passenger vehicle models nor vehicles used for passenger transport purposes are subject to the content described in items 1–16 above).

III. Items and Scope Not Covered by the "Three Guarantees":

1、 Malfunctions resulting from the user's failure to operate, maintain, or adjust the vehicle in accordance with the "User Manual".

2、 Faults caused by the user's self-modification or repair resulting in damage, or by the user's self-disassembly that destroys the original fault state, rendering it impossible to conduct a technical appraisal or analysis; faults caused by improper use or maintenance by the user, or by accidental incidents; and vehicles lacking a repair card or where the card or documentation does not match the actual condition of the vehicle.

3、 Wear parts and consumables do not fall within the scope of the "Three Guarantees" policy (e.g., brake pads, inner tubes, safety wires, light bulbs, plastic components, etc.).

4、 Severe battery undercharge resulting from improper use or maintenance, or improper charging methods, may cause the battery to swell or deform.

5、 Certain accessories, such as the car basket, rearview mirror, raincoat, bumper, and other complimentary items, do not fall within the scope of the Three Guarantees policy.

After-sales Service: A/T/R-Salsservice V

• Users may visit a dealer or a designated service station with their vehicle purchase certificate and warranty card to avail themselves of the Three Guarantees service; we kindly ask you to fill out the warranty documentation carefully.

• Our company requires all distributors or authorized (designated) repair stations for the "XF2200DZH" brand to possess comprehensive after-sales service capabilities and must be able to provide "Three Guarantees" services as well as paid repair services for "XF2200DZH" users. We welcome your supervision.

Comparison Table for Quality Status Analysis of Official Brands vs. Counterfeit Brands – Quality Analysis.v

Warning: LeLetterToUser v

Comparative Analysis of Quality Between Established Brands and Counterfeit/Non-Standard Brands			
	1、 Full Vehicle Exterior	2、 Material processing	3、 Coating Spraying
Standard ization	Smooth, aesthetically pleasing, and elegant	Strict manufacturing processes and rigorous process control	Uniform coloration, crystal-clear and lustrous
Miscellane ous brands	Design plagiarism and patchwork	Rough and casual, with a simplistic approach	Pale colors or overly bright, eye-straining colors
	4、 Chassis and Cab	5、 plastic component	6、 Electrical and Mechanical Control
Standard ization	Made from high-quality materials and featuring a well-designed structure.	Made from genuine materials, strong, durable, and long-lasting.	Brand certified – safe and durable
Miscellane ous brands	Materials are substandard and the structure is disorganized.	The materials are substandard and degrade more rapidly.	Small-scale workshops – crude and substandard production.
	7、 Wheel Configuration	8. Safety Assurance	9. Server Sales & Maintenance
Standard ization	Strict manufacturing processes and brand certification	Can provide effective protection	Reasonable protection, worry-free use
Miscellaneous brands	Small manufacturers, inferior materials	Cannot guarantee safety	Transitioning to bankruptcy or facing insolvency risks

Currently, some counterfeit products bearing our company's "XF2200DZH" brand or those whose brands or names closely resemble ours (i.e., containing the phrase "XF2200DZH" or sounding similar to "XF2200DZH") have appeared on the market, leading consumers to mistakenly believe they are counterfeit versions of "XF2200DZH"; this situation些These products are manufactured by small-scale producers or unlicensed workshops, including some non-brand-name or counterfeit brands;their materials, craftsmanship, and overall vehicle quality are extremely poor; they lack proper craftsmanship guarantees and cannot ensure the long-term quality or operational safety of the products.Please exercise caution when making purchases, and we welcome reports from consumers; our company will keep the identities of all reporters confidential and offer rewards to those who provide such information!

Higher standards, better products, faster service